

DocuCentre S2520/S2320

A3 Monochrome Multifunction Device

The perfect solution for small- and medium-sized businesses



FUJIFILM

FUJI xerox 



A3 Monochrome Desktop Digital Multifunction Device Excellent functionality improved efficiency

A multifunction device equipped with all the essentials to take on any office task. Compact and featuring superb performance, this brand new machine is set to dramatically improve efficiency in your office.



DocuCentre S2520/S2320

Combining high productivity with eco-friendly operation.

Copy Print B/W:25/23ppm
Max:A3

Scan B/W:28/25ppm
Colour:28/25ppm

Net Work Ethernet
100BASE-TX/10BASE-T

Speedy operation

Accelerate office workflows with high-speed output

Take advantage of high-speed copying at 25 pages/minute simplex and 18 pages/minute duplex*. The ideal machine for anyone in a rush, DocuCentre S2520/S2320 has a fast First Copy Output Time of 6.5 seconds and boasts a warm-up time of only 19 seconds.

* DocuCentre S2520. 23 pages/minute simplex and 17 pages/minute duplex with DocuCentre S2320.

Improve productivity with fast colour scanning

Enjoy fast scans at 28 pages/minute*, which significantly reduces time spent digitizing large documents resulting in higher productivity.


* DocuCentre S2520. 25 pages/minute with DocuCentre S2320.

Outstanding productivity features

Convenient ID card copy function

Both sides of a card can be copied onto one side of one single sheet of paper. You can copy up to two cards at the same time.

ID Card

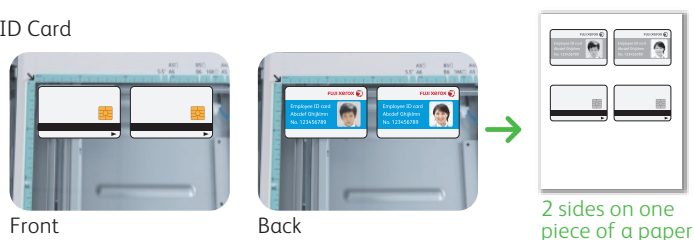

Alternating horizontal-vertical stacking

When outputting many copies of the same document — such as materials for meetings — each copy can be stacked in alternating horizontal-vertical orientation to save time when collating.



Print and copy on heavy paper

Print certificates or greeting cards on 60-216 gsm paper. Printing can be easily customized for nearly any job, eliminating the need to outsource for this purpose.

Print multiple pages on one sheet

Different documents can be printed on either side of a piece of paper. Also, by reducing the size of documents, up to eight pages can be printed onto one sheet to help conserve paper.



Two scanning methods

Choose from two ways to scan, depending on where you are: Pull scan from a PC, or Push scan when at the device. When using Push scan, you can select a resolution between 200 and 600 dpi.



Fax more effectively. (Optional)

Send faxes quickly

Register up to 99 numbers for speed dialling. Legal-size documents can be received on one sheet.

Redial button

Pressing the redial button displays a list of recent transmissions. Simply select the desired recipient to resend a document.



Simple broadcast function

Quickly send a document to a group of recipients. This eliminates repetitive tasks when sending the same document to a multiple destinations.

Eco friendly

Internationally recognized environmental compliance

The amount of ultrafine particles (UFPs*) emitted during continuous printing has been reduced by optimising operational settings.

* Ultrafine particles (UFPs) are tiny particulates less than 100 nanometres in diameter. They are far smaller than the PM2.5 particle class, the regulations for which are becoming stricter from an environmental perspective.

Adjustable toner output

Toner density is adjustable with six different settings. Printing at lower density saves toner and helps reduce costs.



Options

On a desk or on the floor.
Choose the location
that's best for you.



NDA model



One Tray Module



One Tray Module
Two Tray Module

Note: Use FUJIFILM Business Innovation toner cartridges to ensure optimal performance and efficient recycling.

DocuCentre S2520/S2320 Functions & Specifications

Basic Function / Copy Function

Item	Description
	DocuCentre S2520 DocuCentre S2320
Type	Desktop
Memory capacity	512 MB (Max : 512 MB)
Scan Resolution	600 x 600 dpi
Print Resolution	600 x 600 dpi
Warm-up Time	19 seconds or less (20 degrees Celsius room temperature)
Original Size	Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book
Paper Size	Max 297 x 432 mm, A3, 11 x 17", Bypass Tray : 297 x 432 mm, A3, 11 x 17"
	Min A5, Bypass Tray : 127 x 98 mm
	Lead Edge : 5.5 mm, Trail Edge : 6.0 mm, Right & Left Edges : 5.5 mm
Paper Weight ^{*1}	Tray 1 60 to 90 gsm
	Tray 2, 3, 4 (Option) 60 to 216 gsm
	Bypass Tray 60 to 216 gsm
First Copy Output Time	6.5 seconds or less (A4 LEF)
Continuous Copy Speed ^{*2}	A4 LEF/B5 LEF 25 ppm, In Duplex : 18 ppm
	A4 16 ppm, In Duplex : 10 ppm
	B4 15 ppm, In Duplex : 9 ppm
	A3 13 ppm, In Duplex : 8 ppm
Paper Tray Capacity ^{*3}	Standard Tray1 : 250 sheets, Bypass Tray : 100 sheets
	Optional One Tray Module (Tray2) : 500 sheets Two Tray Module (Tray3 + Tray4) : 1000 sheets
	Max 1850 sheets (Tray1 + Tray2 + Tray3 + Tray4 + Bypass Tray)
Output Tray Capacity ^{*3}	250 sheets (A4 LEF)
Power Source	AC220-240 V +/- 10 %, 6 A, 50 / 60 Hz common
Maximum Power Consumption	AC 220V: 1.3kW or less AC 240V: 1.4kW or less Low Power mode: 14W or less Sleep mode: 2W or less
Dimensions	W 595 x D 584 x H 569 mm
Weight ^{*4}	33 kg

*1: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement. *2: The speed may be reduced due to the image quality adjustment. The performance may be reduced depending on the paper type. *3: When Using 80 gsm paper. *4: Excluding Toner Cartridge.

Fax Function (Optional)

Item	Description
Original Size	Max : A3
Recording Paper Size	Max : A3, Min : A4
Transmission Time*	2 seconds and more but fewer than 3 seconds
Transmission Mode	Super G3 / G3 ECM / G3 (ITU-T)
Applicable Lines	PSTN / PBX, 1 port

*: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high-speed mode (28.8kpbs or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

Print Function

Item	Description
Type	Built-in type
Continuous Print Speed ^{*1}	Same as the Basic Specifications / Copy Function
Print Resolution	600 x 600 dpi
Page Description Language	FX HBPL (Host Based Print Language)
Operation System ^{*2}	Windows 10 (32bit), Windows 10 (64bit) Windows 8.1 (32bit), Windows 8.1 (64bit) Windows 8 (32bit), Windows 8 (64bit) Windows 7 (32bit), Windows 7 (64bit) Windows Vista (32bit), Windows Vista (64bit) Windows XP (32bit), Windows XP Professional (64bit) Windows Server 2019 (64bit) Windows Server 2016 (64bit) Windows Server 2012 R2 (64bit), Windows Server 2012 (64bit) Windows Server 2008 R2 (64bit) Windows Server 2008 (32bit), Windows Server 2008 (64bit) Windows Server 2003 (32bit), Windows Server 2003 (64bit)
Interface	USB2.0, Ethernet 100BASE-TX / 10BASE-T

*1: The speed may be reduced due to image quality adjustment. Print speed may also drop depending on the documents.

*2: Please refer to our web site for the latest supported operating systems.

Scan Function

Item	Description
	DocuCentre S2520 DocuCentre S2320
Type	Colour Scanner
Scan Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scan Speed*	B / W : 28 ppm, Colour : 28 ppm [Standard Document (A4 LEF), 200dpi] B / W : 25 ppm, Colour : 25 ppm [Standard Document (A4 LEF), 200dpi]
Interface	USB2.0, Ethernet 100BASE-TX / 10BASE-T

*: The scanning speed varies depending to documents. Standard Document (A4 LEF), 200 dpi, using TWAIN driver (USB).

Duplex Automatic Document Feeder

Item	Description
	DocuCentre S2520 DocuCentre S2320
Original Size	Max : A3, 11 x 17", Min : A5
Paper Weight	38 to 128 gsm (2 Sided : 50 to 128 gsm)
Capacity*	110 sheets
Feeding Speed (A4 LEF Simplex)	25 ppm (A4 LEF, 1 Sided) 18 ppm (A4 LEF, 2 Sided)
	23 ppm (A4 LEF, 1 Sided) 17 ppm (A4 LEF, 2 Sided)

*: When Using 80 gsm paper.

Notes

- 1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall the Company be liable for any damages whatsoever arising from loss of data.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies. The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

For Your Safety
Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

FUJIFILM

For more information or detailed product specifications, please call or visit us at

FUJIFILM Business Innovation Vietnam Co., Ltd.

Head Office
12th Floor, Vincom Center
72 Le Thanh Ton, Dist. 1, HCMC
Tel: (84-28) 38 290 038
Fax: (84-28) 38 290 032

Ha Noi Branch
14th Floor, VCCI Tower
9 Dao Duy Anh, Dong Da Dist.,
Ha Noi
Tel: (84-24) 38 241 063
Fax: (84-24) 38 241 113

Hai Phong Branch
5th Floor, TD Office Building
20A Le Hong Phong, Ngo
Quyen Dist., Hai Phong
Tel: (84-225) 3859 236
Fax: (84-225) 3859 239

Da Nang Branch
3rd Floor, Danabook Building
76-78 Bach Dang, Hai Chau
Dist., Danang
Tel: (84-236) 3892 896
Fax: (84-236) 3892 895

fujifilm.com/fbvn

This catalog includes Fuji Xerox product(s), licensed from Xerox Corporation. The distributor of the product(s) is FUJIFILM Business Innovation Corp. Xerox, Xerox and Design, as well as Fuji Xerox and Design are registered trademarks or trademarks of Xerox Corporation in Japan and/or other countries.

FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation.

The information is as of April, 2021. PIC-0072 VN (1501-R3)

FUJI xerox